




N17 Mute Curtain (5Fire)

COD PRODUS: 30090




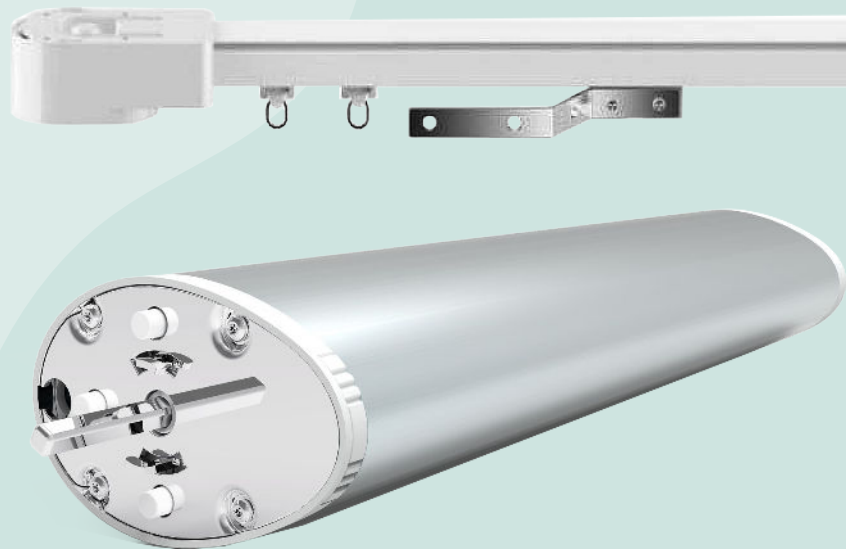

Powerful and Silent Motor



Finished Rail



Transmitter



Accessories




N17 Mute Curtain (5 Fire)

Specificatii Tehnice Importante



Specificatii Tehnice N17 Mute Curtain

Motor No.	N30090	Control ways	1.wifi control (app)--smart home 2.dry contact control--smart home 3. RS 485/RS 232 control--smart home 4.Radio remote control (3 wire wiring) 5.strong current control--smart home (AC power switch double-key 5 wires wiring)
Motor name	N17-4A5-2 super silent curtain motor	Specification	1.hand pull start 2.support hand pull when power off 3.stop by resistance 4.soft start and soft stop 5.adjustable speed (two speed option) 6.automatic keep limit 7.curtain (fabric) rebound 8.constant speed synchronization 9.motor up or down installation
Torque (Nm)	2Nm	Loading capacity (kg)	80kgs
Power (W)	48	Maximum length (m)	6m, 12m (add joiner)
Speed(cm/s)	10-20	Power wies	5 wires
Rated revolution (rpm)	80/120 rpm	Warranty	3 years
Working voltage (V)	AC 100-240V		
Noise index (dB)	18.9dB		
Receiving frequency (Mhz)	868mhz		

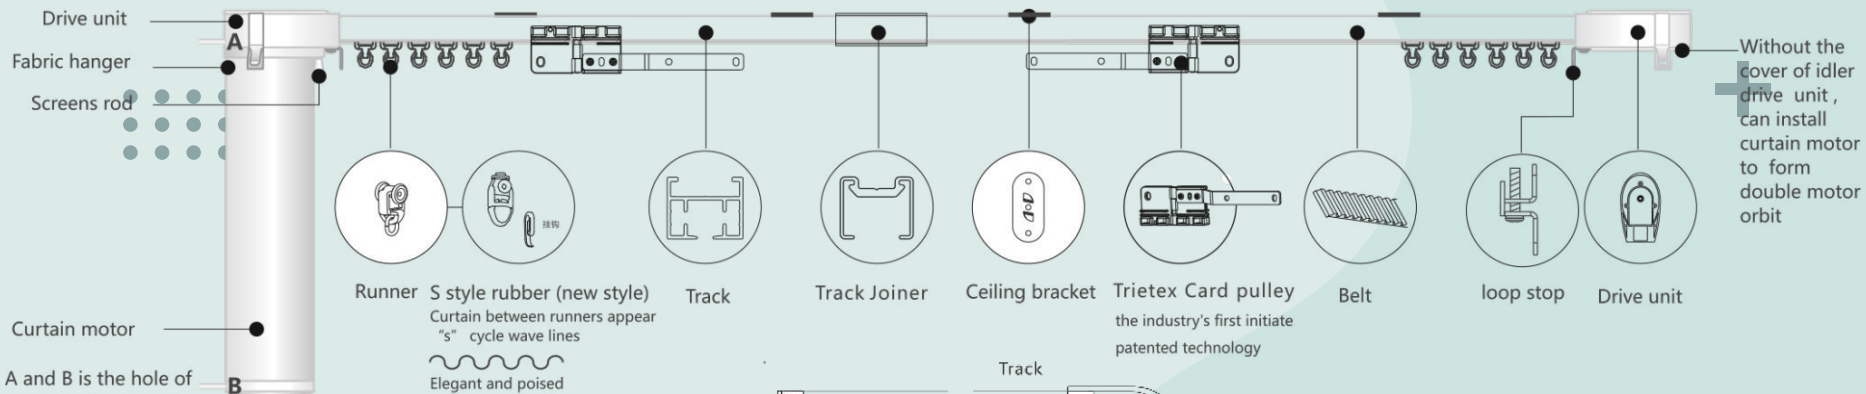

Product Features :

1. Motor has specific memory function, automatic stop sensor for the travel (no need to set travel in advance).
2. With hand-operated & motor operated mode, both are easy to operate.
3. One-stop design, built-in power + receiver, with external interface (2 x RJ11 interface)
4. Motor can start by itself by pulling just 20cm of the fabric (no need the transmitter).
5. The complete set of system with the best material, with high quality coating inside out of the track, belt with steel wire, and cloth on both side, all the hardware accessories are made of stainless steel.
6. Group control, central control .
7. "S" style rope runner combination "patent design, easy to assemble and disassemble, pretty appearance, can be designed to a dynamic "S" style movable curtain.
8. Strong power, low noise design, different bending track can be customized.

N17 Mute Curtain



e-homs.ro


+40 723 230 802




N17 Mute Curtain

terminal switch


(Note: Please use the rebound or light touch switch)

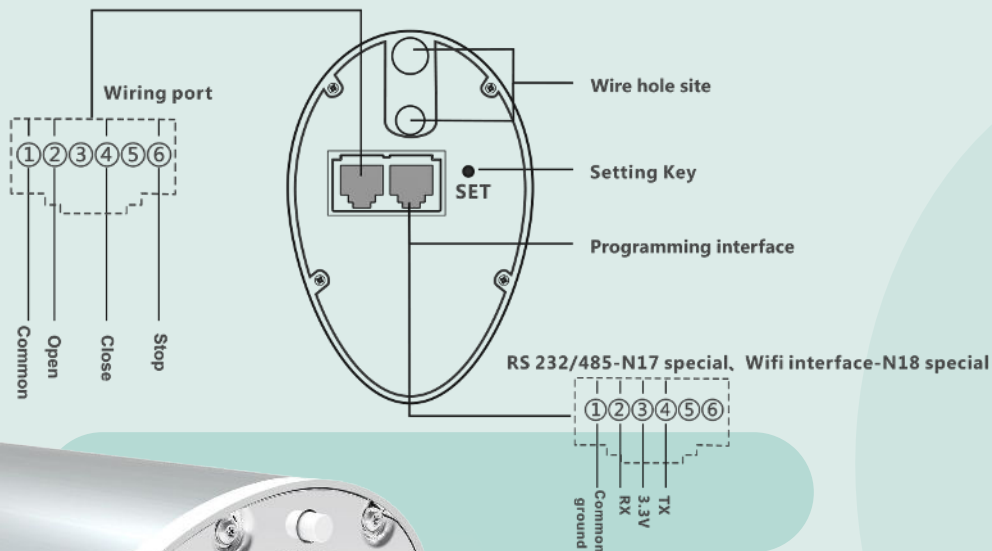



ControlMethod one :

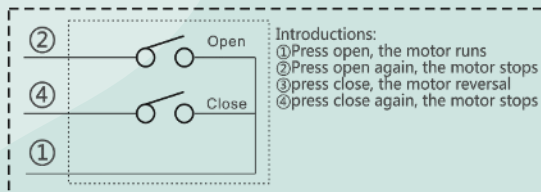

ControlMethod two :

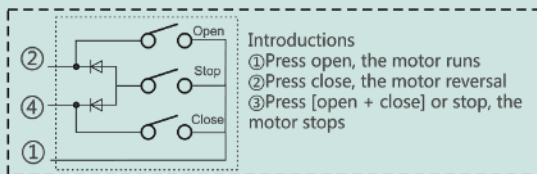

ControlMethod Three :

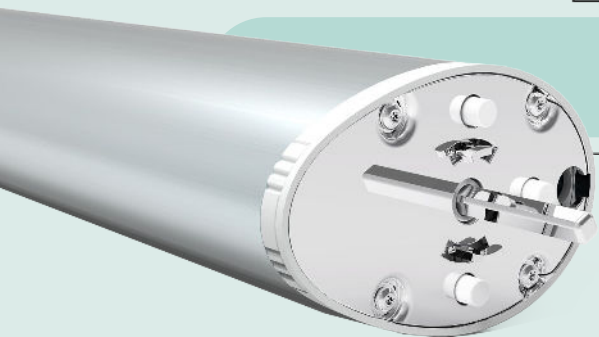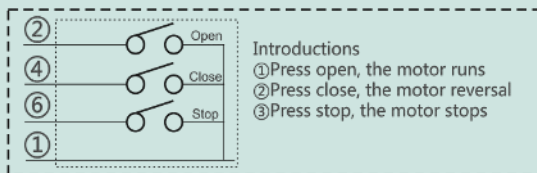

Compania își rezervă dreptul de a modifica designul și specificațiile produsului fără o notificare prealabilă, iar fotografiile sunt doar cu titlu de referință. H71277 A4

Amplitudo observada: $\frac{5.5}{7.7} = \frac{6.6}{9.9}$ Simples $\frac{6.6}{9.9}$

Descriere: 1. Grăful are o sarcină maximă a motorului unic de 2N cu oiler în stăni de pină (lungime / cale de deschidere etc.)

- Descriere:** 1. Grăuul este sardina maximă a monelui unic de 2N cu diferite setări de pin (lungime, cale de deschidere etc.).
La calcularea sardiei maxime, trebuie luată în considerare și rata de onduire a materialului.

1. Assembling shoulder socket and attaching upper limb socket to shoulder.
2. Attaching upper limb socket to shoulder.
3. Attaching upper limb socket to shoulder.
4. Putting arm length in excess.
5. Attaching upper limb socket to shoulder.
6. Attaching upper limb socket to shoulder.
7. Attaching upper limb socket to shoulder.
8. Attaching upper limb socket to shoulder.
9. Attaching upper limb socket to shoulder.
10. Attaching upper limb socket to shoulder.
11. Attaching upper limb socket to shoulder.
12. Attaching upper limb socket to shoulder.
13. Attaching upper limb socket to shoulder.
14. Attaching upper limb socket to shoulder.
15. Attaching upper limb socket to shoulder.
16. Attaching upper limb socket to shoulder.
17. Attaching upper limb socket to shoulder.
18. Attaching upper limb socket to shoulder.
19. Attaching upper limb socket to shoulder.
20. Attaching upper limb socket to shoulder.
21. Attaching upper limb socket to shoulder.
22. Attaching upper limb socket to shoulder.
23. Attaching upper limb socket to shoulder.
24. Attaching upper limb socket to shoulder.

Figure 1 illustrates the assembly sequence of the robot, divided into two main parts: **Montarea motorului** (Motor Assembly) and **Montarea corpului robotului** (Robot Body Assembly).

Montarea motorului:

1. Assembling the motor to the gear.
2. Assembling the gear to the motor.
3. Assembling the motor to the gear.
4. Assembling the gear to the motor.
5. The motor assembly.

Montarea corpului robotului:

1. Assembling the body to the motor.
2. Assembling the body to the motor.
3. Assembling the body to the motor.
4. The robot body assembly.

The final assembly is shown in a 3D model with labels A, B, C, and D.

Parau / Interupător din doua butoane, mod conexiune cu 5 fire

Cablu motor

- 1 Cablu albastru = Cablu Negativ
- 2 Cablu roșu = Linie Live
- 3 Cablu albastru = Cablu Negativ
- 4 Cablu Negativ = Cablu Pozitiv
- 5 Interupător = Cablu Interupătoare

2) Cablu Negativ și Pozitiv nu trebuie înșurșate!

Dacă după conectare vă dărină un fir în plus, blocați un cap pentru izolare.

1 Negativ
2 Pozitiv
3 Interupătoare

Parau / Interupător din doua butoane, mod conexiune cu 4 fire

Cablu motor

- 1 Cablu albastru = Cablu Negativ
- 2 Cablu roșu = Linie Live
- 3 Cablu albastru = Cablu Negativ
- 4 Cablu Negativ = Cablu Pozitiv
- 5 Interupător = Cablu Interupătoare

1 Negativ
2 Pozitiv
3 Interupătoare

The diagram illustrates the connection of a cable modem to a Parovod (modem) and a Parovod (modem) to a cable modem.

Top Diagram: Cable modem to Parovod (modem)

- Cable modem:**
 - ① Coaxial test - Coaxial Negativ
 - ② Coaxial test - Coaxial Pozitiv
 - ③ Coaxial test - Coaxial Pozitiv
 - ④ Coaxial test - Coaxial Pozitiv
 - ⑤ Coaxial test - Coaxial Pozitiv
 - ⑥ Coaxial test - Coaxial Pozitiv
 - ⑦ Coaxial test - Coaxial Pozitiv
 - ⑧ Coaxial test - Coaxial Pozitiv
 - ⑨ Coaxial test - Coaxial Pozitiv
 - ⑩ Coaxial test - Coaxial Pozitiv
- Parovod (modem):**
 - ① Coaxial test - Coaxial Negativ
 - ② Coaxial test - Coaxial Pozitiv
 - ③ Coaxial test - Coaxial Pozitiv
 - ④ Coaxial test - Coaxial Pozitiv
 - ⑤ Coaxial test - Coaxial Pozitiv
 - ⑥ Coaxial test - Coaxial Pozitiv
 - ⑦ Coaxial test - Coaxial Pozitiv
 - ⑧ Coaxial test - Coaxial Pozitiv
 - ⑨ Coaxial test - Coaxial Pozitiv
 - ⑩ Coaxial test - Coaxial Pozitiv

Bottom Diagram: Parovod (modem) to Cable modem

- Parovod (modem):**
 - ① Coaxial test - Coaxial Negativ
 - ② Coaxial test - Coaxial Pozitiv
 - ③ Coaxial test - Coaxial Pozitiv
 - ④ Coaxial test - Coaxial Pozitiv
 - ⑤ Coaxial test - Coaxial Pozitiv
 - ⑥ Coaxial test - Coaxial Pozitiv
 - ⑦ Coaxial test - Coaxial Pozitiv
 - ⑧ Coaxial test - Coaxial Pozitiv
 - ⑨ Coaxial test - Coaxial Pozitiv
 - ⑩ Coaxial test - Coaxial Pozitiv
- Cable modem:**
 - ① Coaxial test - Coaxial Negativ
 - ② Coaxial test - Coaxial Pozitiv
 - ③ Coaxial test - Coaxial Pozitiv
 - ④ Coaxial test - Coaxial Pozitiv
 - ⑤ Coaxial test - Coaxial Pozitiv
 - ⑥ Coaxial test - Coaxial Pozitiv
 - ⑦ Coaxial test - Coaxial Pozitiv
 - ⑧ Coaxial test - Coaxial Pozitiv
 - ⑨ Coaxial test - Coaxial Pozitiv
 - ⑩ Coaxial test - Coaxial Pozitiv

[illegible]

Etapa 1: Instalarea motorului în placa de bază

1. Așezarea motorului în placa de bază.

2. Verificarea conexiunii cablului de alimentare.

Etapa 2: Instalarea cablului de alimentare în placa de bază

1. Conectarea cablului de alimentare la placa de bază.

2. Verificarea conexiunii cablului de alimentare.

1. Selecting the printer model: The user selects the printer model from a list of options. The selected model is shown in the 'Model' field.

2. Selecting the language: The user selects the language for the printer's control panel. The selected language is shown in the 'Language' field.

3. Selecting the network connection: The user selects the network connection type (Wired or Wireless). The selected connection type is shown in the 'Network' field.

2) Testeaza pe butonul SET al termoprelului din secunda.	Observați Liniile din dreapta din nr 13 Regulați motorul: Reînfrigați până la capacitate	⇒	5,5	Regulați motorul Până la capacitate	⇒	
2) Testeaza pe butonul SET al termoprelului din secunda.	Observați Liniile din dreapta din nr 13 Regulați motorul: Reînfrigați până la capacitate	⇒	5,0	Regulați motorul Până la capacitate	⇒	
2) Testeaza pe butonul SET al termoprelului din secunda.	Observați Liniile din dreapta din nr 13 Regulați motorul: Reînfrigați până la capacitate	⇒	4,5	Regulați motorul Până la capacitate	⇒	
2) Testeaza pe butonul SET al termoprelului din secunda.	Observați Liniile din dreapta din nr 13 Regulați motorul: Reînfrigați până la capacitate	⇒	4,0	Regulați motorul Până la capacitate	⇒	